



LEVIOR s.r.o.
Tovačovská 3488/28
750 02 Přerov
CZ61973939

Návod k použití

Zelený laser

Položka č.: 26203



Před použitím si přečtěte pečlivě manual.
Manuál byl přeložen z originálu.

Varování a upozornění

- Zelený laser je klasifikován jako laser třídy II. Dávejte pozor, abyste během provozu přístroje nevystavovali své oči laserovému paprsku. Přímé vystavení laserovému paprsku po dlouhou dobu může být nebezpečné pro vaše oči.
- Nepokoušejte se přístroj rozebrat. Nechte jej opravit u svého prodejce nebo dodavatele. Vlastní demontáž může problém zhoršit.
- Při připevňování nástroje na stativ se ujistěte, že je nástroj bezpečně připevněn ke stativu a že svorky nohou stativu jsou bezpečně upevněny. Pokud není bezpečně upevněn nebo utažen, hlavní jednotka by mohla spadnout nebo by se mohl stativ převrátit.
- Při nastavování stativu dávejte pozor na stativové patky, které jsou ostré. Tyto ostré hroty umožňují bezpečné umístění stativu na zemi.
- Nepoužívejte přístroj k zaměřování na řidiče vozidel nebo chodce. Vyvarujte se umístění laseru na vysoce reflexní materiály, jako je zrcadlo. Při likvidaci tohoto přístroje proveďte opatření vyjmutím baterií, aby nedošlo k vyzařování laseru.


Opatření

- Tato řada laserů je přesný přístroj a mělo by se s ním zacházet opatrně.
- Přístroj by neměl být skladován nebo používán při extrémní teplotě nebo při práci na místě vystaveném rychlým změnám teploty. Při použití mimo rozsah okolní teploty nemusí přístroj správně fungovat.
- Uchovávejte v přenosném kufříku a umístěte na suché místo, které není vystaveno vibracím, prachu nebo vysoké vlhkosti.
- Pokud se teplota skladování a používání výrazně liší, ponechte přístroj v pouzdře, který se může přizpůsobit okolní teplotě.
- Přístroj by měl být přepravován nebo přenášen opatrně, aby nedošlo k nárazu nebo vibracím.
- Přístroj by měl být uložen v přepravním kufříku a zabalen s výplňovým materiálem. Vždy zacházejte s předmětem opatrně.
- Ujistěte se, že dodržujete položky v návodu k použití pro správné používání přístroje

1. Technické údaje

Přesnost	±0.2mm/m
Nivelační rozsah	±3°
Pracovní rozsah/s detektorem	30m (uvnitř)/50m (venku) s detektorem
Závit pro stativ	5/8"
Typ laseru	Class II, Green: 515nm
Čas automatického vyrovnavání	<3 S
Frekvence přijímače	5KHz
Provozní teplota	-10°C to 40°C
Skladovací teplota	-20°C to 60°C
Nepřetržitá pracovní doba	min 7 hod (všechny zelené diody zapnuty)
Třída ochrany	IP 54
Čistá hmotnost	0,9 kg
Systém napájení	3,7V 5200mAh Li-ion baterie

2.Funkce

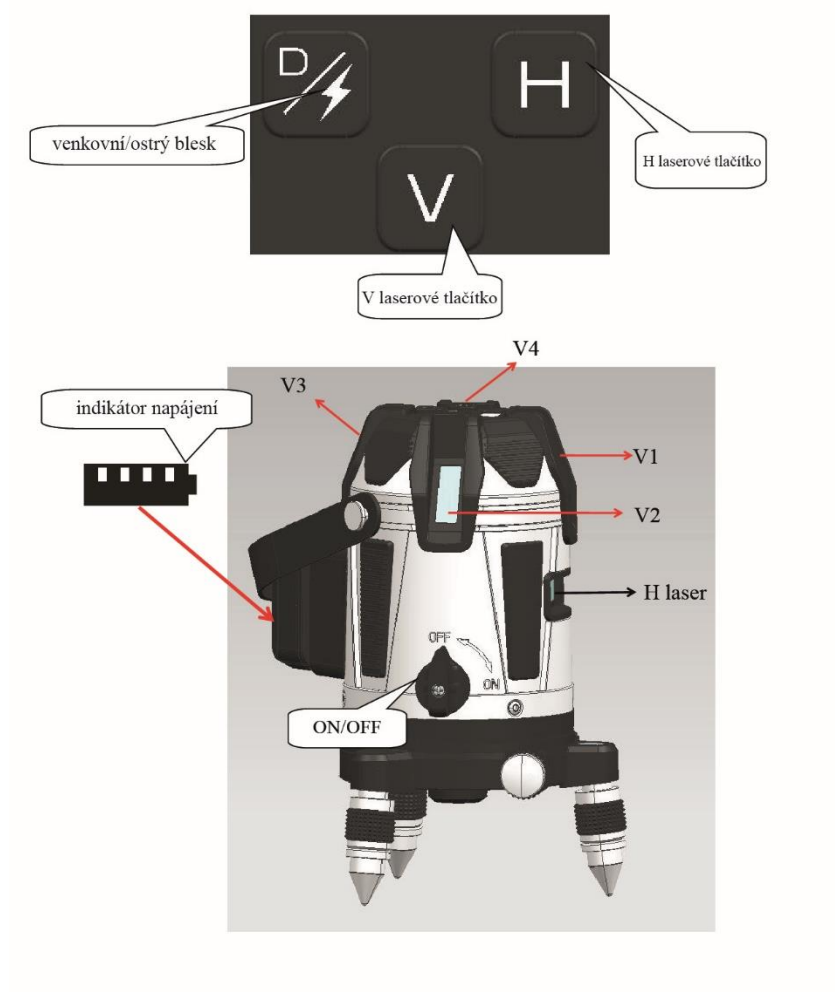

2.1 Vypnuto

Když se nepoužívá, měl by být vypínač ON/OFF v poloze vypnuto, kyvadlo uzamčeno a laser zavřený.

2.2 Zapnuto

Když je spínač ON/OFF v poloze ON, kyvadlo otevřené a H laser otevřený, přístroj je připraven k automatické nivelaci v rozsahu 3°.

Tlačítko H: zapnutí/vypnutí H laseru

Stiskněte tlačítko H, laser H by měl být zavřený. Znovu stisknutím tlačítka H, otevřete laser H.

Tlačítko V: ovládání laseru V.

Stiskněte tlačítko V, otevřete laser V1&V3 → stiskněte tlačítko V, otevřete laser V2&V4 →stiskněte tlačítko V, všechny lasery V se uzavřou

Venkovní/ostrý-blesk

Stiskněte toto tlačítko, otevřete venkovní režim, který lze použít s přijímačem, → stiskněte toto tlačítko, režim úspory energie, který lze stále používat s přijímačem → stiskněte tímto tlačítkem zavřete venkovní režim a otevřete režim ostrý-blesk, všechny lasery budou mít blesk o 20 Hz.

Alarm : když zařízení překročí rozsah automatického vyrovnání, laser bude blikat-bzučet.

2.3 Manuální režim

Když je přístroj vypnutý, dlouze stiskněte tlačítko H na 2 sekundy manuální režim, H laser se otevře (laser bude blikat každé 4,5 sekundy) pak je provoz stejný jako běžně. Když všechny lasery budou zavřené, zavřete manuální režim.

2,4 baterie

Napájení je 3,7V 5200mAh Li-ion baterie.

Zkontrolujte prosím stav baterie pomocí indikátoru napájení kontrolka je modrá. Indikační LED se ukazuje zleva doprava.

25%-50%-75%-100%.


Když svítí pouze jedna LED, je 25% energie

Při prvním bliknutí LED je jen 5% energie, baterii prosím nabijte.

2,5 nabíjení

Použijte nabíječku 5V2A a kabel USB typu c.

Při nabíjení bude LED blikat zleva doprava, po 100% nabití bude LED svítit.



Význam symbolů na štítku



	Odpovídá příslušným požadavkům EU
	Před použitím si přečtěte návod k použití.
	Elektroodpad, viz dále
	Zpětný sběr baterií, viz dále
	Nebezpečí zasažení očí laserem
	Laser třída 2

Likvidace odpadu

Obaly vyhodte to příslušného kontejneru na tříděný odpad.

Aku nářadí



Podle evropské směrnice (EU) 2012/19 se elektrická a elektronická zařízení nesmějí vyhazovat do směsného odpadu, ale je nezbytné je odevzdat k ekologické likvidaci do zpětného sběru elektrozařízení na k tomu určená sběrná místa. Před odevzdáním aku nářadí z něj odejměte akumulátor, který je nutné odevzdat k ekologické likvidaci baterií samostatně (odděleně). Informace o sběrných místech obdržíte na obecním úřadě.

Baterie



Akumulátor obsahuje náplně, které jsou nebezpečné pro životní prostředí, proto jej odevzdejte k ekologické recyklaci / likvidaci do zpětného sběru akumulátorů. Podle evropské směrnice o akumulátorech a bateriích 2006/66 EC nesmí být nepoužitelné akumulátory vyhozeny do směsného odpadu či životního prostředí. Informace o sběrných místech obdržíte na obecním úřadě.

Dovozce: Levior s. r. o., Tovačovská 3488/28, Přerov 75002

EU Prohlášení o shodě

Výrobce Levior s.r.o. • Tovačovská 3488, CZ-750 02 Přerov prohlašuje, že následně označené přístroje svojí koncepcí a konstrukcí i provedeními uvedenými na trhu splňují níže uvedené požadavky Evropské unie. Toto prohlášení se vydává na výhradní odpovědnost výrobce.

Předmět deklarace-identifikace produktu:

Produkt: Laser
Číslo modelu: 26203
Číslo položky: 26203

splňují následující odpovídající normy, včetně jejich případných pozměňujících příloh, kterými se prohlašuje shoda s následujícími odpovídajícími ustanoveními:

2014/30/EU:

EN IEC 61326-1:2021
IEC 61326-1:2020
EN 60825-1:2014+A11:2021
EN 61010-1:2010+A1:2019

Kompletaci technické dokumentace 2014/30/EU provedl Ondřej Marek se sídlem na adrese výrobce. Technická dokumentace (2014/30/EU) je k dispozici na adrese výrobce.

Místo a datum vydání EU prohlášení o shodě: Přerov, 30. 5. 2025

Osoba oprávněná vypracovat EU prohlášení o shodě jménem výrobce (podpis, jméno, funkce):

 **LEVIOR** s.r.o.®

Tovačovská 3488/28, 750 02 Přerov
IČO 61973939 DIČ CZ61973939
tel.: 581 746 256-8, fax: 581 746 255



Ondřej Marek
Jednatel společnosti Levior

Instructions for use

Green laser

Item No.: 26203



Read manual carefully before use

Warning and caution

- The green laser level is ranked as class II laser. Be careful not to expose your eyes to the laser beam while the instrument is operating. Direct exposure to the laser beam for a long time may be hazardous to your eyes.
- Do not try to dismantle the instrument. Have it repaired by your dealer or supplier. Dismantling it by yourself may worsen the problem.
- When attaching the instrument to a tripod, make sure the instrument is securely fixed to the tripod and the tripod leg clamps should be securely fastened. If not securely fastened or tightened, the main unit could fall off or the tripod could fall over.
- When setting the tripod, beware of the tripod shoes which are sharp. These sharp points allow tripod to be securely positioned on the ground.
- Avoid using the instrument to target on vehicle drivers or pedestrians. Avoid putting the laser on a highly reflective material such as mirror. When disposing of this instrument, take a measure by removing the batteries so that the laser will not be emitted.


Precaution

- This laser series is a precision instrument and should be treated with care.
- The instrument should not be store or used in extreme temperature or job on place subject to rapid change of temperature. The instrument may not function properly if used out of the ambient temperature range.
- Store inside the carrying case and place in a dry area not subject to vibration, dust or high moisture.
- When storage and usage temperature are widely different, leave the instrument in the case unit it can adjust to the surrounding temperature.
- The instrument should be transported or carried carefully to avoid impact or vibration.
- The instrument should be stored in the carrying case and packed with cushioning material. Always handle the item with care.
- Be sure to observe the items in the instruction manual for proper use of the instrument.

Technical data

Over-all accuracy	±0.2mm/m
Leveling range	±3°
Working Range/ Detector	30m (indoor)/50m (outdoor) with detector
Tripod thread	5/8"
Laser Type	Class II, Green: 515nm
Auto-Leveling time	<3 S
Receiver frequency	5KHz
Operating Temperature	-10°C to 40°C
Storage Temperature	-20°C to 60°C
Continuous Working Time	min 7 hour (all green diodes on)
Protection class	IP 54
Net weight	0,9 kg
Power system	3,7V 5200mAh Li-ion battery

2.Function

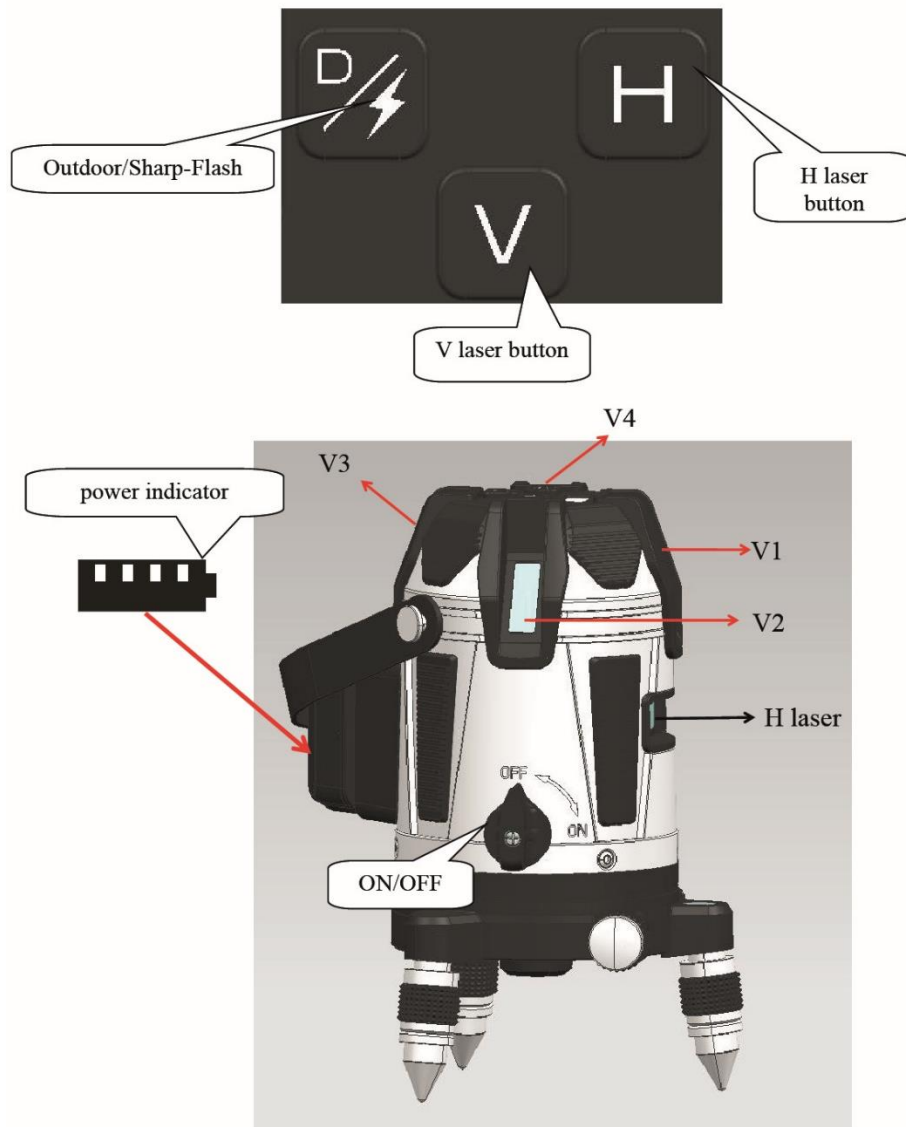

2.1 OFF

When not in use, the ON/OFF switch should be in the off position, pendulum locked and laser close

2.2 ON

When the ON/OFF switch in ON position, pendulum open and H laser open, the instrument is ready to level automatically within 3°level.

H button : on/off H laser

Press H button, H laser close. And press H button again, H laser open.

V button : control V laser.

Press V button, open V1&V3 laser → press V button, open V2&V4 laser

→press V button, all V lasers closed

Outdoor/Sharp-Flash

Press this button, open the outdoor mode that can use with receiver, → press this button, power saving mode that still can use with receiver→press this button, close outdoor mode and open Sharp-Flash mode, all lasers will flash by 20HZ.

Alarm : when device over auto-Leveling range, laser will flash with buzzer.

2.3 Manual mode

When the instrument is off, long press H button for 2 seconds will be into manual mode, H laser will be opened (laser will flash every 4.5seconds), then operation same as normal situation. Close manual mode when all lasers closed.

2.4 battery

The power supply is 3.7V 5200mAh Li-ion battery pack.

Please check the battery power with the power indicator, the indicator light is blue. The indicator LED from left to right is represented 25%-50%-75%-100%.


There is 25% power when only the first LED is on.

There is only 5% power when first LED flashing, please charge the battery.

2.5 charging :

Use 5V2A charger and USB type-c cable.

The LED will be flashed from left to right, the LED will be always on when the power is 100%.



Meaning of symbols on labels



	Meets relevant EU requirements
	Read the instruction before use
	Electrical waste, see below
	Battery recovery, see below
	Laser shoot eye hazard
	Laser class 2

Waste disposal

The packaging is wholly composed of environmentally-friendly materials that can be disposed of at a local collection points.

Cordless power tools



According to the European Directive (EU) 2012/19, electrical and electronic equipment may not be disposed of as mixed waste, but it is necessary to return them for ecological disposal to the return of electrical equipment at designated collection points. Before returning the cordless tool, remove the battery, which must be disposed of in an environmentally friendly manner separately. You will receive information about collection points at the municipal office.

Battery



The battery contains cartridges that are dangerous for the environment, so return it to the batteries for ecological recycling / disposal. According to the European Directive on Accumulators and Batteries 2006/66 EC, unusable batteries must not be disposed of with mixed waste or the environment. You will receive information about collection points at the municipal office.

Importer: Levior s. r. o., Tovačovská 3488/28, Přerov 75002

EU Declaration of Conformity

Manufacturer Levior s.r.o. • Tovačovská 3488, CZ-750 02 Přerov declares that the subsequently marked devices, based on their concept and construction, as well as the designs listed on the market, meet the requirements of the European Union listed below. This declaration is issued under the sole responsibility of the manufacturer.

Subjects of declaration-product identification:

Product: Green laser
Model No.: 26203
Item No.: 26203

comply with the following harmonized standards, including their amending annexes, if any, by which conformity with the following harmonization provisions is declared:

2014/30/EU:


EN IEC 61326-1:2021
IEC 61326-1:2020
EN 60825-1:2014+A11:2021
EN 61010-1:2010+A1:2019

The completion of technical documentation 2014/30/EU was performed by Ondřej Marek with his registered office at the manufacturer's address. The technical documentation (2014/30/EU) is available at the manufacturer's address.

Place and date of issue of the EU declaration of conformity: Přerov, 30. 5. 2025

Person authorized to draw up the EU declaration of conformity on behalf of the manufacturer (signature, name, function):


Tovačovská 3488/28, 750 02 Přerov
IČO 61973939 DIČ CZ61973939
tel.: 581 746 256-8, fax: 581 746 255



Ondřej Marek
managing director Levior s.r.o